

PROJECT #: 1715-00	DATE
DISTRIBUTION	07/21/17
50% CONST. DOCS	08/09/17
100% CONST. DOCS	12/04/17
ADDENDUM 5	

DEMOLITION
ROOF PLAN


A1.0

GENERAL NOTES

1. REMOVE EXIST ROOF SYSTEM (S), TYP.
2. REMOVE EXIST FLASHINGS, TYP.
3. CONTRACTOR TO TAKE REASONABLE CARE TO NOT DAMAGE SUBSTRATE WHEN REMOVING EXIST ROOF SYSTEM(S), TYP.
4. CONTRACTOR TO REMOVE AND REINSTALL ROOF TOP MOUNTED MECHANICAL EQUIPMENT AS NECESSARY TO FACILITATE REPLACEMENT OF ROOF SYSTEM.

SPECIFIC NOTES- DEMO PLAN

1. REMOVE EXIST ROOFING MEMBRANE DOWN TO EXIST INSUL, TYP.
2. EXIST EXHAUST FAN TO REMAIN. REMOVE EXIST FLASHING.
3. EXIST VTR TO REMAIN. REMOVE EXIST FLASHING, TYP.
4. EXIST RD TO REMAIN. REMOVE EXIST DOME, TYP.
5. PARAPET COPING TO BE REMOVED, TYP.
6. EDGE FLASHING TO BE REMOVED, TYP.
7. EXIST MECH EQUIPMENT SUPPORT TO REMAIN. REMOVE EXIST FLASHING, TYP.
8. EXIST MECH EQUIPMENT CURB TO REMAIN. REMOVE EXIST FLASHING, TYP.
9. BUILDING EXPANSION JOINT-REMOVE EDGE FLASHING, CAP AND FLASHING, TYP.
10. EXIST FAN SUPPORT TO REMAIN. REMOVE EXIST FLASHING, TYP.
11. EXIST DUCT PENETRATION. REMOVE EXIST FLASHING, TYP.
12. REMOVE EXIST SCUPPER AND FLASHING, TYP. INFILL OPENING.
13. EXIST CONDUIT PENETRATION. REMOVE PITCH PAN. PATCH DECK.
14. EXIST VENT.
15. EXIST ELEC. COND. IN PITCH PAN. REMOVE PITCH PAN AND FLASHING.
16. EXISTING ROOFING SYSTEM TO REMAIN.
17. EXIST COPINGS TO REMAIN. REMOVE/ REINSTALL AS NEEDED TO INSTALL NEW UPPER ROOF FLASHING.
18. CORE # 1 LOCATION.
19. CORE #2 LOCATION.
20. REMOVE PORTION OF EXIST INSUL.
21. LIMITS OF INSUL REMOVAL.

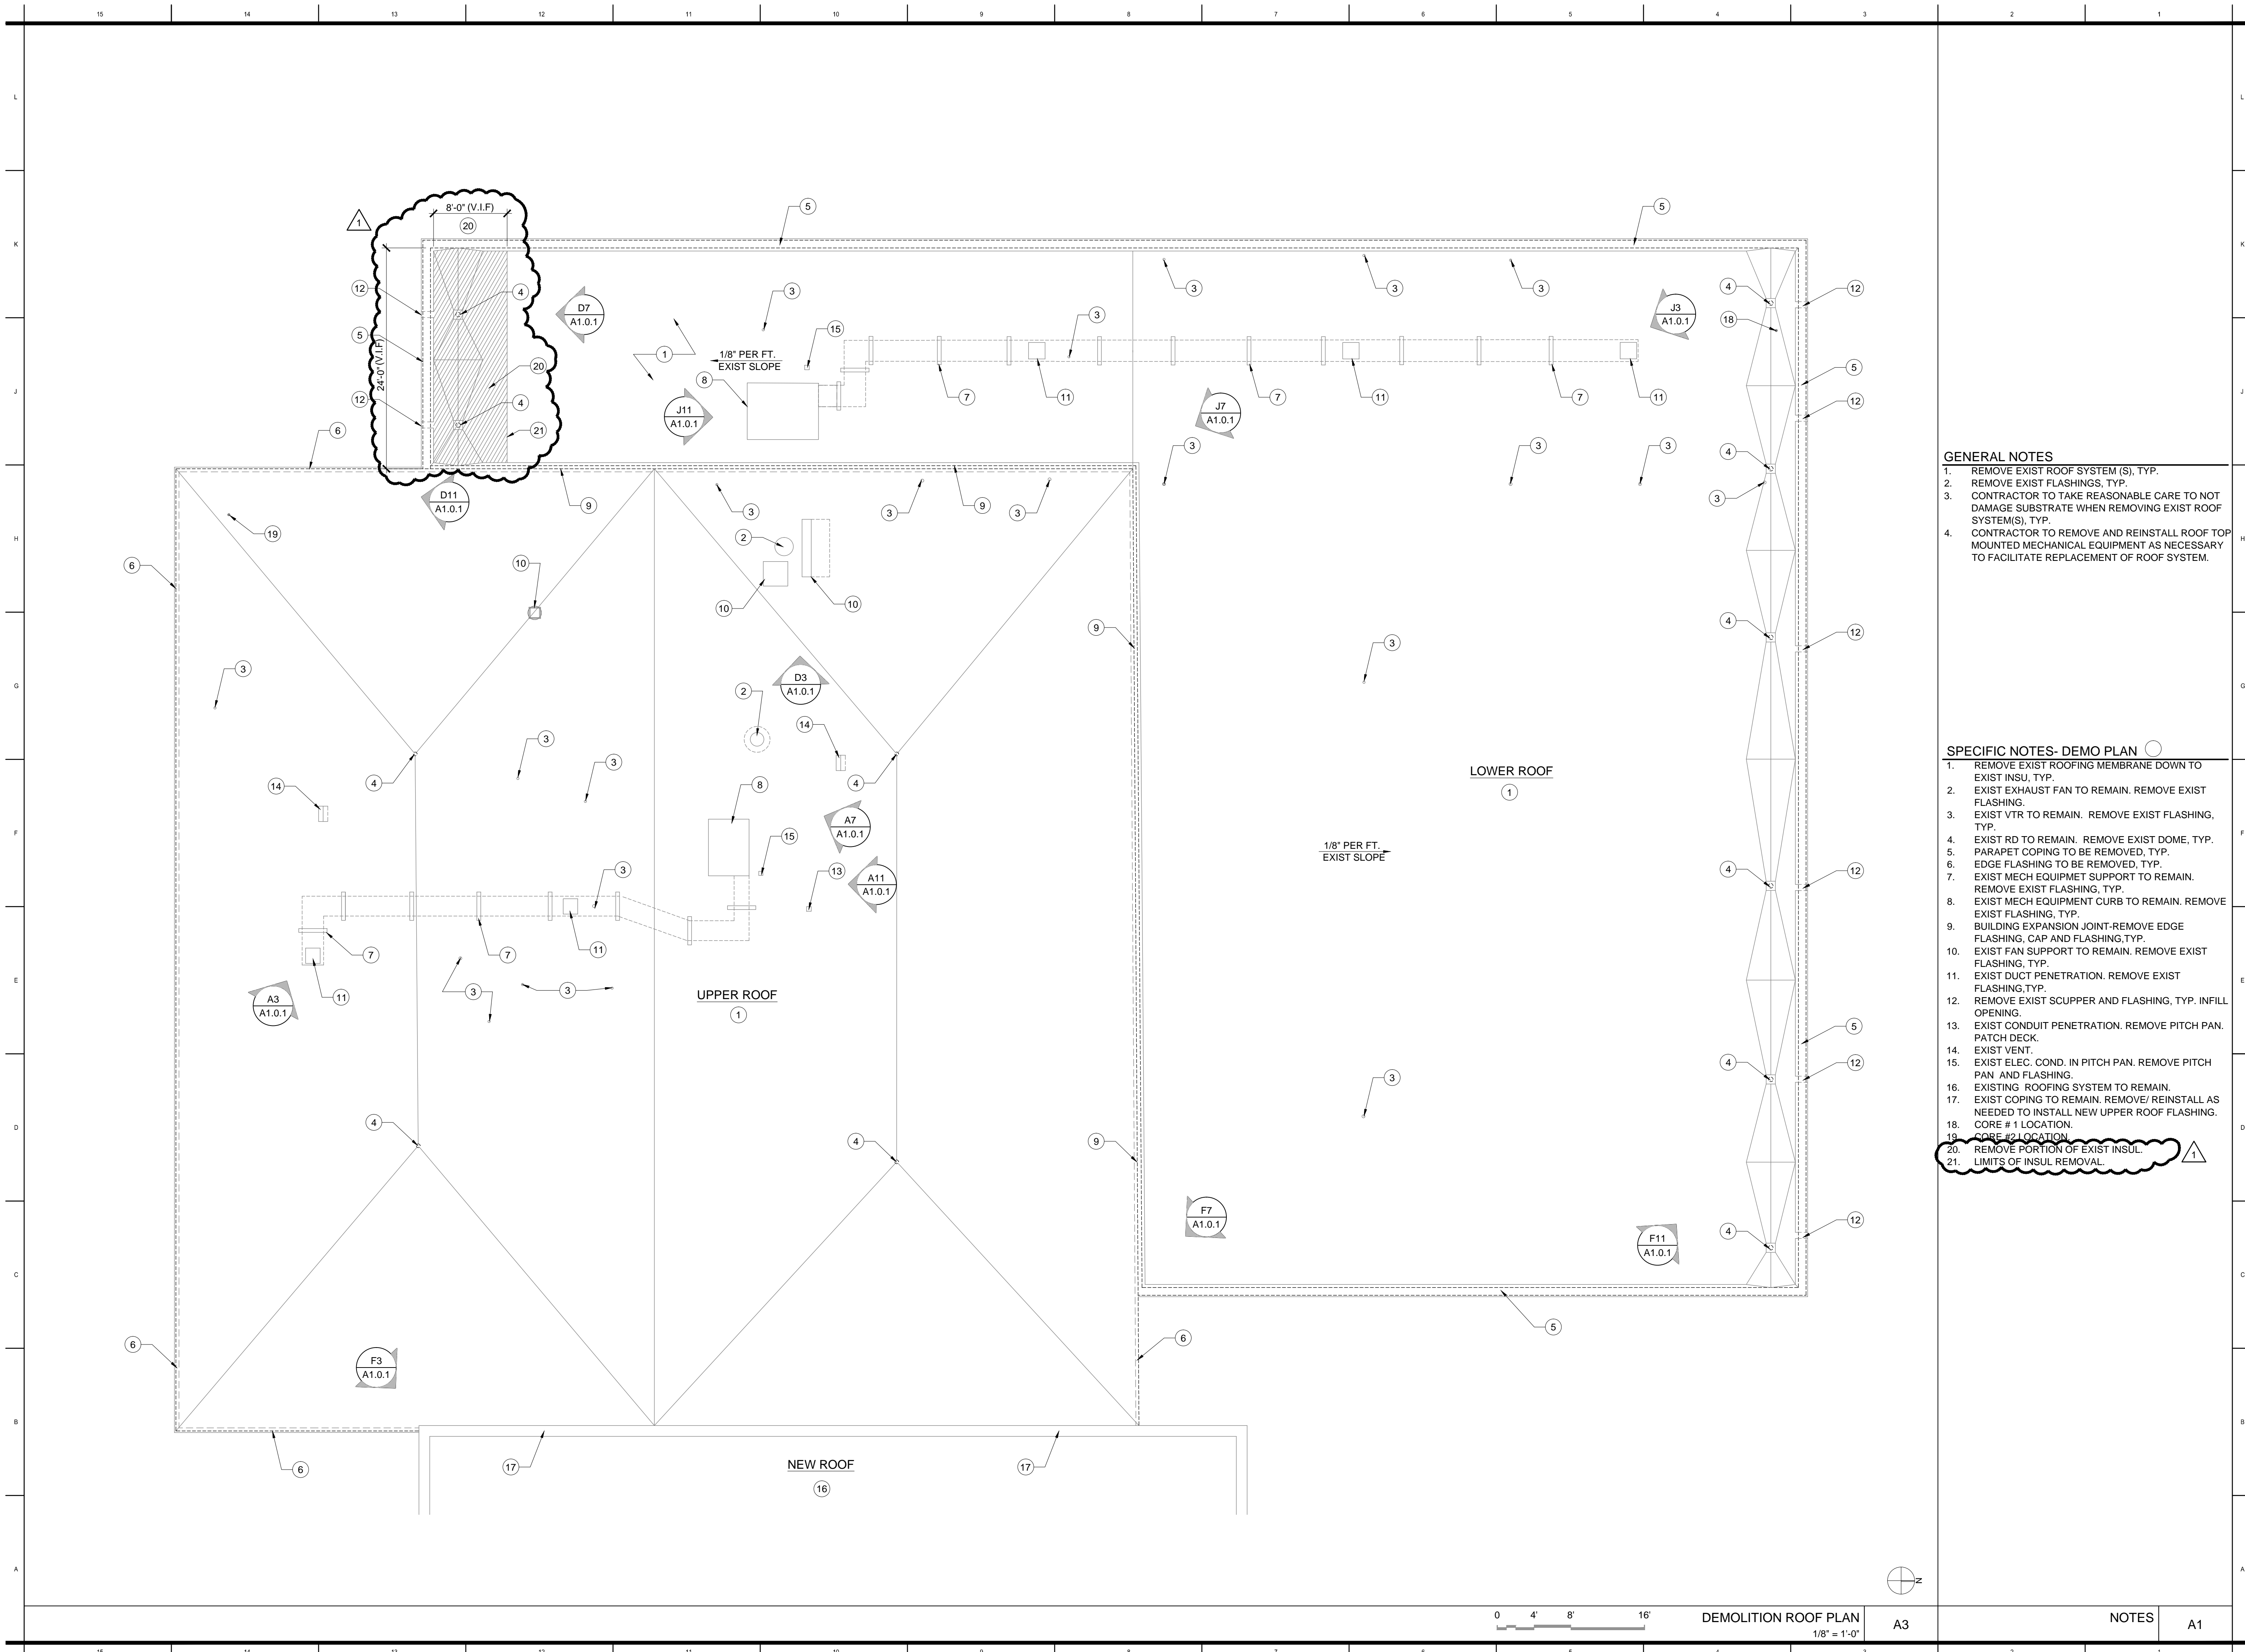

DEMOLITION ROOF PLAN
1/8" = 1'-0"

NOTES A1